



Hercu™ LED Bulkhead

30W / 60W

FEATURES

- System Light Efficacy 120 LPW
- Powder Coated Heavy-duty Die Cast Housing
- Easy Installation & Maintenance
- IP66
- Five Years Warranty
- CE, RoHS
ETL, DLC Pending

TYPICAL APPLICATIONS

- Loading Dock
- Conveyor
- Workshop
- Platform

SPECIFICATIONS

PERFORMANCE

LED Chip	Philips Lumileds
Color Temperature	4500K-5500K (2500K-6500K Optional)
CRI	≥70
Lumen Maintenance	L70>100,000 hours (Calculated Using TM-21 Calculator)
Input Voltage	100-277 VAC
Power Factor	0.95 minimum
IP Rating	IP66
IK Rating	IK10
Surface Treatment	Corrosive resistant polyester powder coat finish
Lens Material	PC 3000U

ENVIRONMENTAL

Operating Temperature	-30 to 50°C (-22 to 122°F)
Storing Temperature	-40 to 80°C (-40 to 176°F)
Humidity	15% to 95% RH



PHYSICAL

Fixture Material	Aluminum Alloy
------------------	----------------

WARRANTY

5 Years



■ Specifications

Picture	Part#	Power	Efficacy(IES)	Total Lumen	N.W	Product Dimensions
	EO-BHHC-30	30W	120lm	3,600lm	3.6kg/7.9lbs	257.5×174×127mm 10.1×6.9×5in
	EO-BHHC-60	60W	120lm	7,200lm	3.4kg/7.6lbs	257.5×174×127mm 10.1×6.9×5in





■ Photometrics

45 DEGREE (30W)

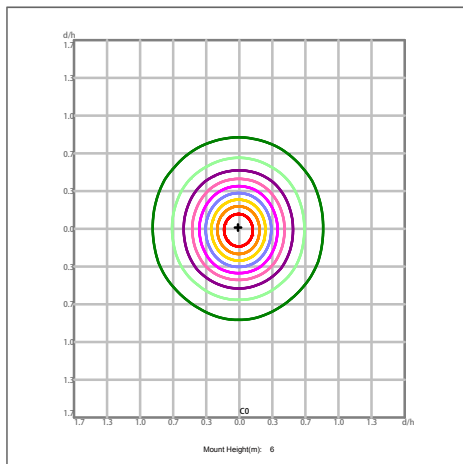
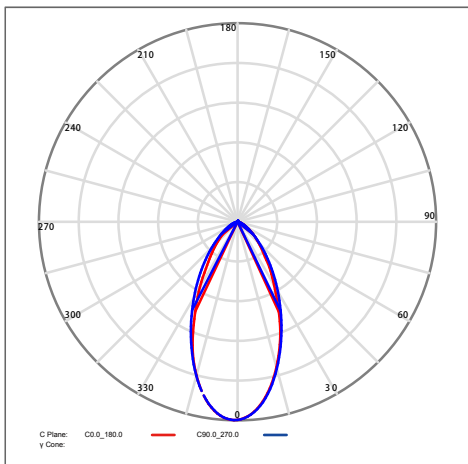


110 DEGREE (60W)

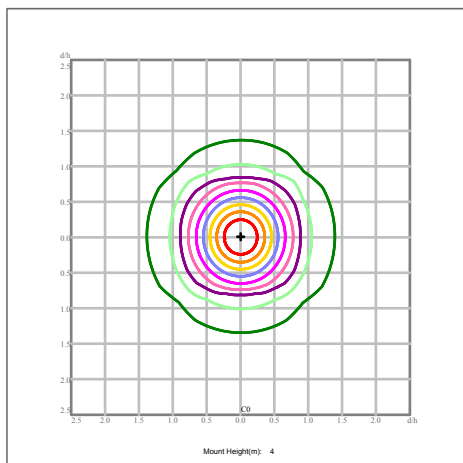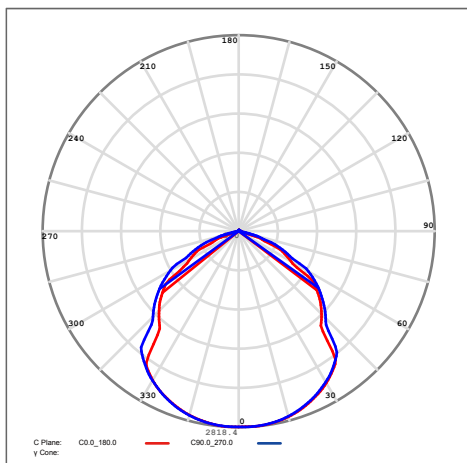

■ Accessories

Protection Mask

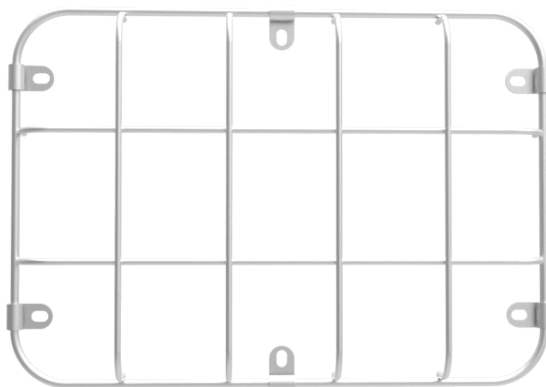
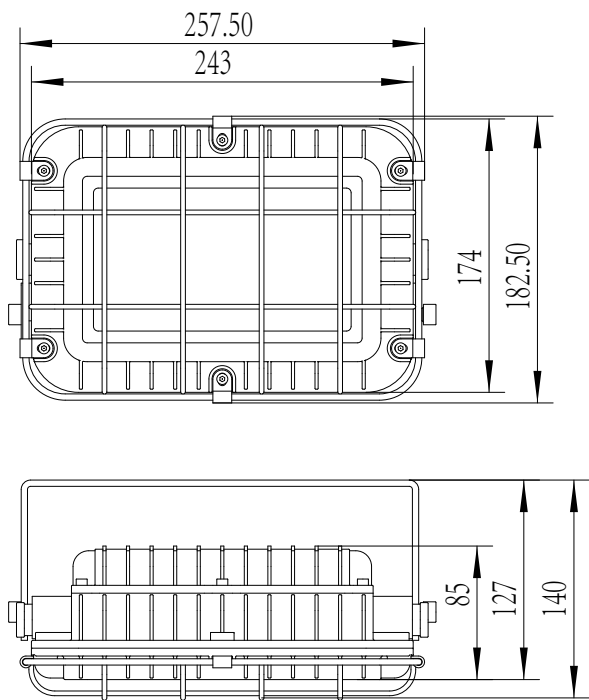


E-LITE semicon


■ Mounting Options




Standard U Bracket

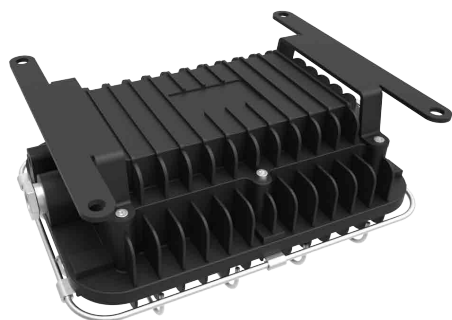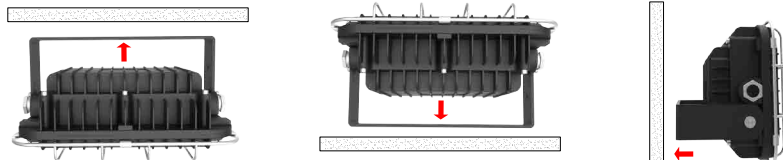

Flush Bracket

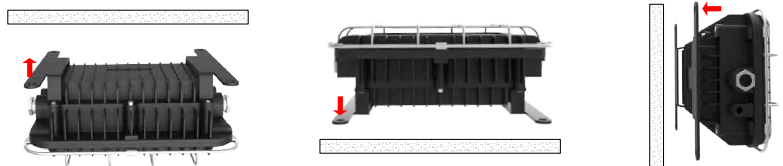

30° Angle Bracket

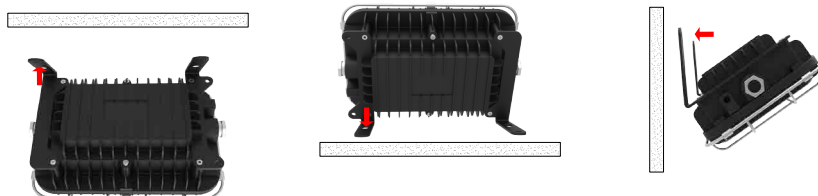

■ **Ordering Information**

